

# MSR255 datalogger

## Robust multi-talent with LCD screen




With up to five different sensors, four additional analogue inputs and an easy to read LCD screen the compact MSR255 offers maximum possible flexibility and user-friendliness.

The measuring tasks undertaken by the user define the way in which the MSR255 is configured: There is a choice of temperature, humidity, air pressure and light sensors (fitted internally within the case or externally on a cable) together with a sensor for measuring acceleration in all three co-ordinate axes. The 3-axis acceleration sensor allows the peak value to be recorded once a second whilst making measurements of up to 1600 values per second per axis. In addition, the voltage of four further external analogue channels or sensors can also be recorded. The analogue inputs feature an alarm output, multiple output switching power supply and an input for starting and stopping data recording.

The memory capacity of the MSR255 is over 2 million measurement parameters. Thanks to its high-capacity lithium polymer battery the datalogger is ideal for long-term data acquisition applications. The 4-row backlit LCD display has four individually configurable views. All acquired data can be quickly transferred to a PC or laptop via the USB interface.

### Technical data for the MSR255

<b>Housing:</b>	Anodised aluminium industrial case (standard IP60, optional IP67 protection class), top-hat rail snapper (TS 35)
<b>Size &amp; weight:</b>	78 x 62 x 38 mm, approx. 222g
<b>Memory capacity:</b>	Over 2000000 measurement parameters.
<b>Operation:</b>	Two keys for selecting functions and controlling data recording
<b>Display:</b>	Four row LCD matrix display
<b>LED:</b>	3 colour LED to indicate data recording, alarm and charge condition
<b>Integrated sensors:</b>	Selection of different sensors for temperature, relative humidity, pressure, light and 3-axis acceleration/position
<b>Measurement rate (MR):</b>	1/s to every 12h (acceleration up to 1600/s)
<b>Storage rate (SR):</b>	1/s to every 12h
<b>Power supply:</b>	Rechargeable lithium polymer battery 2300 mAh
<b>PC software:</b>	Free Setup, Reader, Viewer- & Online software (Windows 98/ME/2000/XP/Vista/7)
<b>Interface:</b>	USB (Mini-B)
<b>Operating conditions:</b>	• Temperature -20 °C to +65 °C
<b>Storage conditions:</b>	• Temperatur +5 °C to +45 °C (ideal storage condition for the battery) • 10-95% relative humidity, non-condensing
<b>Standards:</b>	The MSR255 complies with EU-Directives RoHS/WEEE

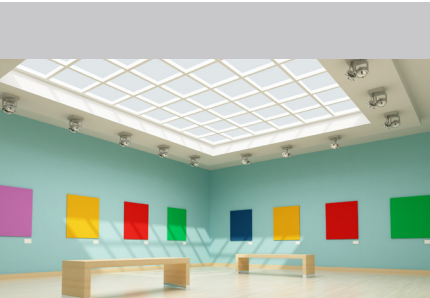

MSR255 with ext. sensors

## Measurement parameters for the sensors (internal and external)

Your MSR255 datalogger can be fitted with up to five different sensors. If required, you may select from the following external sensors in place of the corresponding internal ones: temperature, relative humidity, air pressure and light. The available cable lengths are: 0.15m, 0.40m, 1.00m and 1.60m.

Measured parameters	Working range	Accuracy	Measurement/storage rate
<b>Temperature</b>	-55 °C to +125 °C (with external sensor)	±0.5 °C (0 °C - +65 °C) ±2 °C (-55 °C - +125 °C)	1/s to every 12h
<b>Relative humidity</b> with integrated temperature	0-100% rel. humidity -20 °C to +65 °C	±2% rel. humidity (10-85% rel. humidity, 0 °C to +40 °C)  ±4% rel. humidity (85-95% rel. humidity, 0 °C to +40 °C)  ±0.5 °C (0 °C to +65 °C)	1/s to every 12h
<b>Air pressure</b> absolute, with integrated temperature	0-2000 mbar absolute -20 °C to +65 °C	±2.5 mbar (750-1100 mbar absolute, +25 °C)  ±0.5 °C (0 °C to +65 °C)	1/s to every 12h
	optional: 0-14 bar absolute -20 °C to +65 °C	±50 mbar (1-10 bar absolute, +25 °C)  ±0.5 °C (0 °C to +65 °C)	1/s to every 12h
<b>3-axis acceleration</b> (peak value detection/fast peak)	±15g	±0.15g (+25 °C)	MR: 1600/s SR: 1/s to every 12h
<b>Light</b>	0-65'000 lx	max. sensitivity at 500 nm	1/s to every 12h

## Additional analogue inputs for connecting third-party sensors

It is possible to expand the range of possible applications for which your MSR255 can be used by specifying four analogue inputs. These additional inputs allow external sensors for a wide range of measuring tasks to be connected. If required, these third-party sensors can be powered by the logger's internal battery. The power can be automatically turned on before measurements take place with a pre-settable lead time. This allows any necessary warm-up periods for the sensors to be taken into consideration.

MSR255 with 4 analogue inputs	Technical data
Including an alarm output, multiple output switching power supply and an input for starting and stopping data recording.	4 analogue inputs, 0 to 3.0V, 12 bit Measurement/storage rate: 1/s to every 12h

Its flexibility makes the autonomous MSR255 datalogger ideally suited for the most diverse documentation and monitoring applications in industry and science.

**Configure your ideal MSR255 today –  
We will be pleased to provide you with prices and terms of delivery!**



Modular Signal Recorder


### Options:




External temperature sensor



External humidity sensor



External air pressure sensor



External light sensor

MSR Electronics GmbH

**广州虹科电子科技有限公司**

广州市五山华南理工大学国家科技园  
2号楼 504-505室 邮编：510640  
电话：020-3874 3030; 3874 3032

传真：020-3874 3233

信息：[info@hkaco.com](mailto:info@hkaco.com)

销售：[sales@hkaco.com](mailto:sales@hkaco.com)

支持：[support@hkaco.com](mailto:support@hkaco.com)

[www.hkaco.com](http://www.hkaco.com)